



Leaders in Reception Seating

Lesro Industries, Inc.
1 Griffin Road South
Bloomfield, CT
06002

Phone 860.243.3226
Fax 860.243.5392
www.lesro.com

Assembly Instructions Amherst Wood and Lenox Steel Hip Chair Footrests

Tools required: Phillips screwdriver

Note: These instructions are intended for various models and configurations. Your chair may not look exactly as shown in the diagrams.

Recommendation: Retighten all screws on a seasonal basis to ensure your product remains strong and stable for many years of use.

Weight Capacity: 275 lbs. for Guest, 400 lbs. for Oversize

Parts List

Footrest Tube

Hardware for Amherst

1" Phillips Screws, 4 pcs.

Hardware for Lenox

1/2" Phillips Bolts, 4 pcs.




Lenox Steel



Amherst Wood

1. Assemble chair completely according to separate chair instructions before attaching footrest.
2. Attach footrest tube to back surface of front legs using Phillips screws/bolts into pre-drilled holes, as shown in figures 1 and 2. Tighten securely using care not to strip.
3. Your hip chair is now assembled and ready to use.

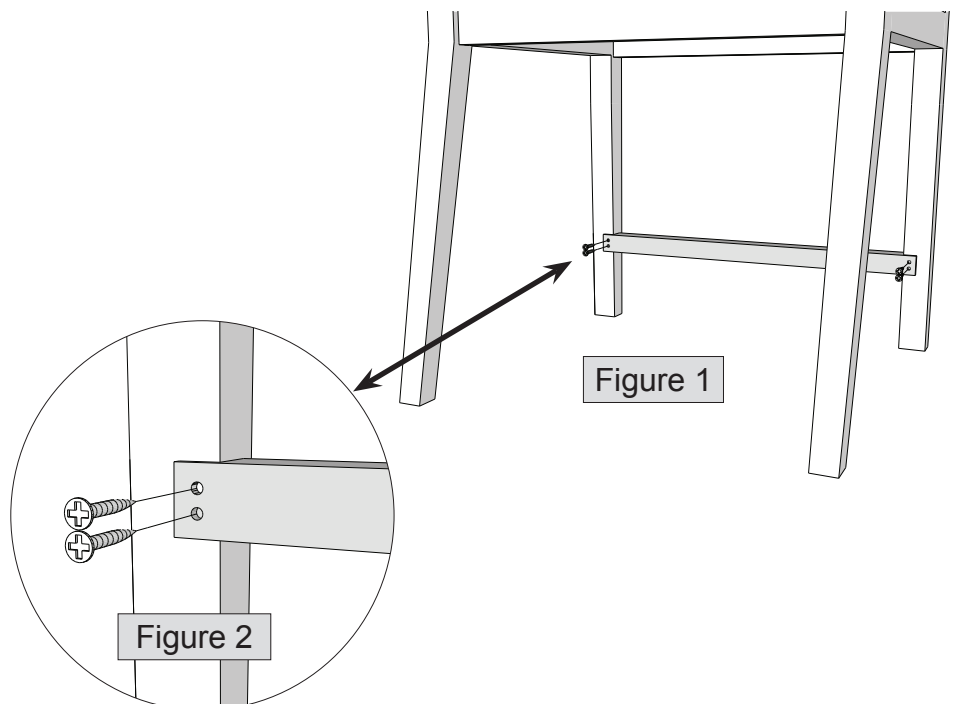

Thank you for purchasing a Lesro product.

Need assistance with assembly? Call Lesro customer service 1-800-275-7545.

Visit us on-line at www.lesro.com